


32-1257


Quick Start

# 170MHz VHF Single-Channel Wireless Lapel Microphone System


## Package contents

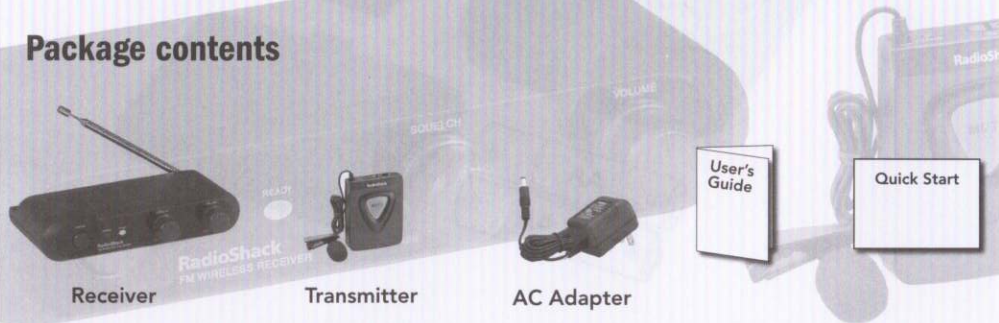


## ② Connect the receiver

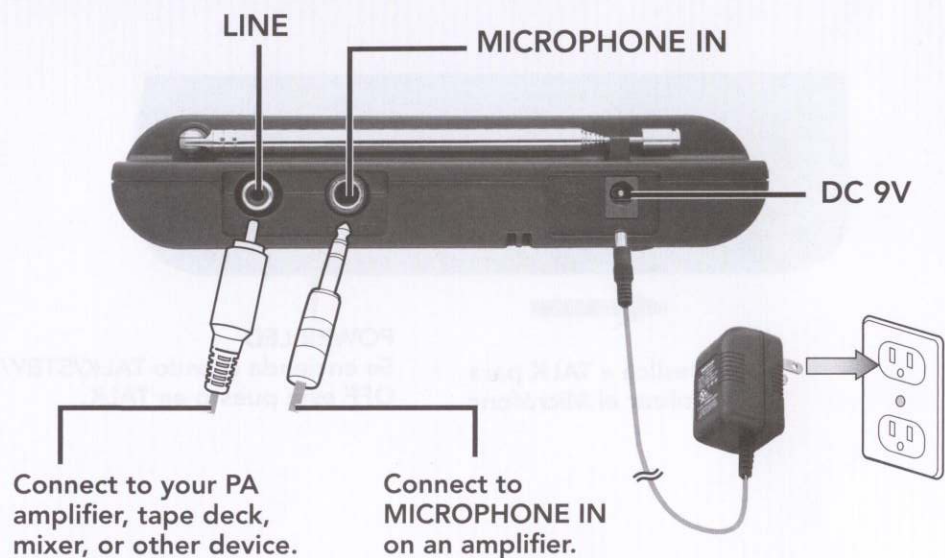

## ① Install 2 AA batteries

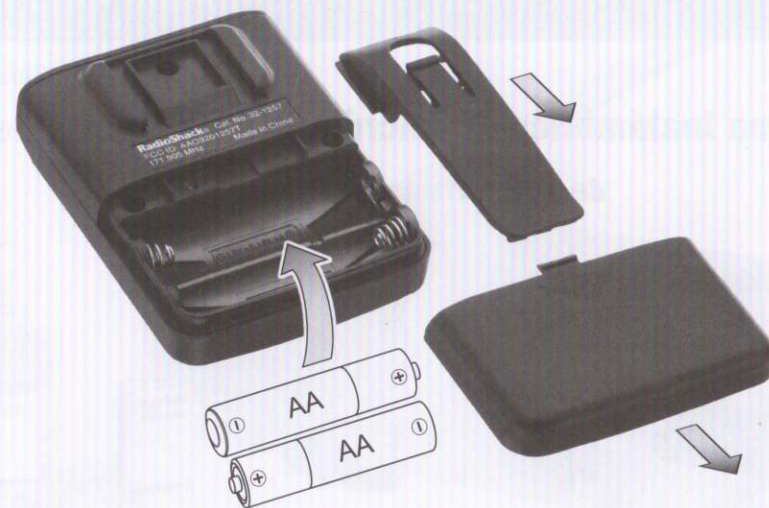

## ③ Use the microphone system

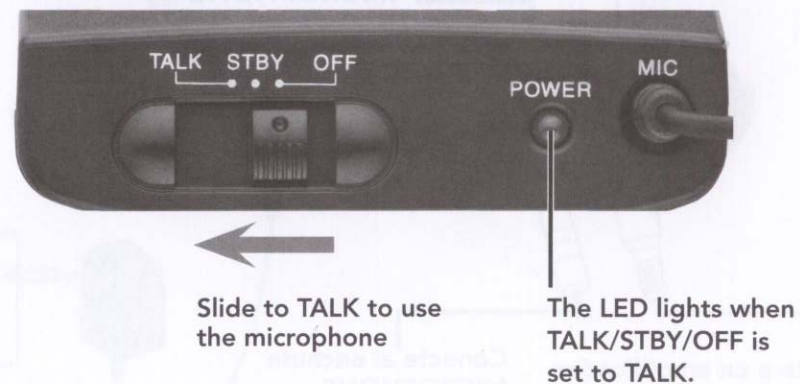

## Package contents

- Receiver
- Adapter
- Quick Start
- Transmitter
- User's Guide

## Features

- Three operating channels so you can use up to three microphone systems at the same time.
- Squelch adjustment on the receiver limits background noise.
- Volume adjustment for adjusting the audio signal amplitude of the Line and Microphone output ports.
- Connect other audio equipment using the Line and Microphone outputs on the receiver.


### ① Install transmitter batteries

Replace the batteries when the POWER LED fails to light up in TALK mode.

1. Turn off your transmitter.
2. Gently pull up on the belt clip's tab and slide down to remove it. Then, remove the battery cover.
3. Install 2 AA batteries matching the polarity symbols (+ and -) marked inside.
4. Replace the battery cover.



2

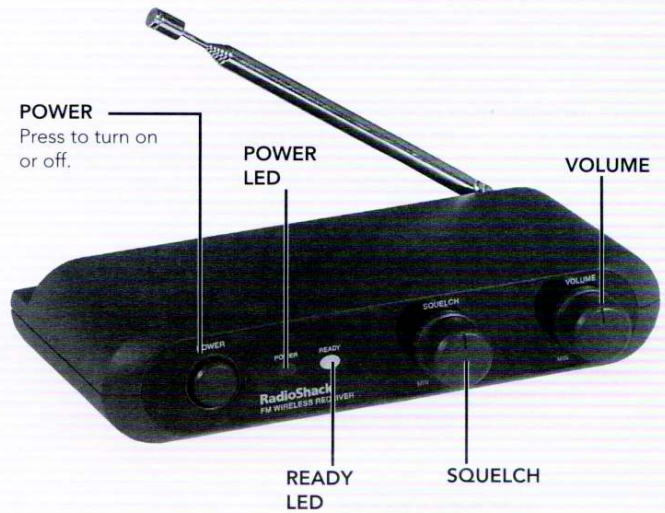


3

### Battery Notes:

- Dispose of old batteries promptly and properly. Do not burn or bury batteries.
- Use only fresh batteries of the required size and recommended type. Do not mix batteries of different sizes or types.
- If you do not plan to use your microphone system for a month or more, remove the batteries. Batteries can leak chemicals that can damage electronic parts.

### ② Connect the receiver

1. Turn off the receiver and set **VOLUME** to **MIN**.
2. Use the 9V AC adapter to connect the receiver to a standard 120V AC wall outlet.

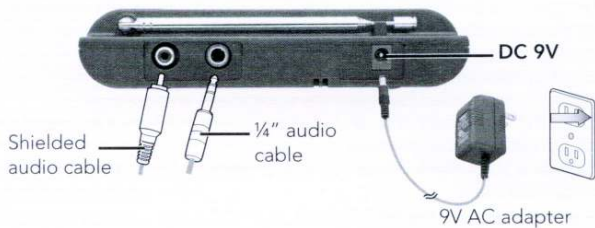

3. Use a shielded audio cable to connect the **LINE** jack on the receiver to the **LINE/AUX** jack on a PA amplifier, tape deck, mixer, or other audio device.

### Notes:


- If you are using your amplifier's **LINE/AUX IN**, connect the **MICROPHONE** jack on the receiver to **MICROPHONE IN** on your amplifier using 1/4" audio cable (not included).

4


- You can connect both output jacks to external devices (for example, an amplifier and a tape recorder) to record microphone signals while listening to audio.

### ③ Use the microphone system

1. Clip the microphone onto your clothing, 3 to 8" from your mouth. Clip the transmitter to your belt or pocket.
2. Push **POWER** to turn on the receiver. The power indicator lights up.
3. Fully extend the receiver's antenna.
4. Set the transmitter's **TALK/STANDBY/OFF** switch to **TALK**. The **READY** indicator on the receiver and the **POWER LED** on the transmitter will light up.

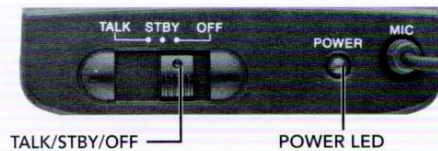

5. Speak at a normal level and adjust **VOLUME** on the receiver.
6. To momentarily turn off the microphone, press and hold **MUTE**. Release **MUTE** when ready to talk.
7. Use **STANDBY** to avoid the popping noise that might occur if you turn **TALK/STANDBY/OFF** to **OFF** and then back to **TALK**.
8. Rotate **SQUELCH** to control the transmitting distance. Turn to minimum to increase the transmitting distance.

-  **Notes:** When you finish using the system, be sure to switch the transmitter to **OFF** mode to save battery power.

5